



Thwing-Albert Instrument Company

More Than a Century of Testing Solutions

Spencer Impact ProTear Attachment

The Spencer Impact Attachment was developed for use with Thwing-Albert's Elmendorf Tear Tester. It provides a convenient method for determining the impact resistance of plastic films and packaging materials under conditions that closely approximate the strain rates that the material is subject to in end-use applications. Extremely consistent, the Spencer Impact Attachment provides one of the most repeatable methods of testing impact resistance of plastic film. The air-operated clamping assembly automates the clamping mechanism to ensure an even higher level of accuracy.

The Spencer Impact Attachment is a modification to the standard ProTear Elmendorf Tearing Tester and consists of a curved metal arm that is permanently attached to the pendulum and is fitted on the end with an interchangeable impact head that is available in various shapes and sizes. This allows different materials and tests to be performed with one machine. An O-ring Sample Clamp is mounted at the top of the clamp upright. The pendulum swings the impact head through the clamped specimen with sufficient force to puncture the sample, and the energy used is recorded.

Specifications

Standard Impact Head:

Radius: 0.5 inches (12.7 mm)

Diameter: 0.75 inches (19.0 mm)

O-Ring Clamp:


Inside Diameter: 89 mm

Sample Size:

5 x 5 inch square (127 mm x 127 mm)

or

5.25 inch diameter circle (133.35 mm diameter)

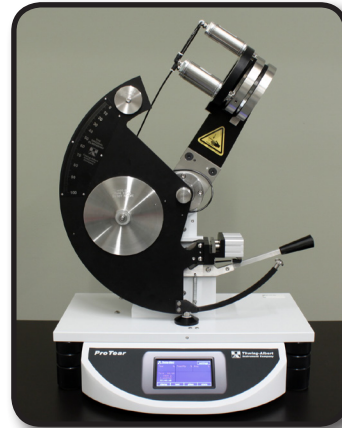

Features:

- Complies with ASTM D3420-94
- Air clamp assembly - min 60 PSI
- Pendulum capacities:
200, 400, 800, 1600, 3200,
6400, 12,800 gram

Thwing-Albert Instrument Company

14 W. Collings Avenue, West Berlin, NJ 08091, USA

tel 856-767-1000 ■ fax 856-767-2615 ■ info@thwingalbert.com

www.thwingalbert.com



**An ISO 9001
Registered Company**