

Vise Grips

TA240k

TA240k Vise Grip

- Tensile force: 2.5 kN
- Opening: 0 - 10mm (with rubber jaws 0-8 mm)
- Weight: 0.29kg each grip (without jaws)

TA240k-S20 Vise Grip

- Tensile force: 1 kN
- Opening: 0 - 20mm
- Weight: 0.33kg each grip (without jaws)


TA240k-S30 Vise Grip

- Tensile force: 1 kN
- Opening: 0 - 30mm
- Weight: 0.32 kg each grip (without jaws)

TA240k-S50 Vise Grip

- Tensile force: 1 kN
- Opening: 0 - 50mm
- Weight: 0.57kg each grip (without jaws)

- Temperature range: 0°C - +180°C (depending on jaws)
- Other temperature ranges possible on request
- Body: aluminium
- Scope of delivery: 1 pair (without jaws)
- Also as pneumatic version available (see data sheet TA240k+ko)

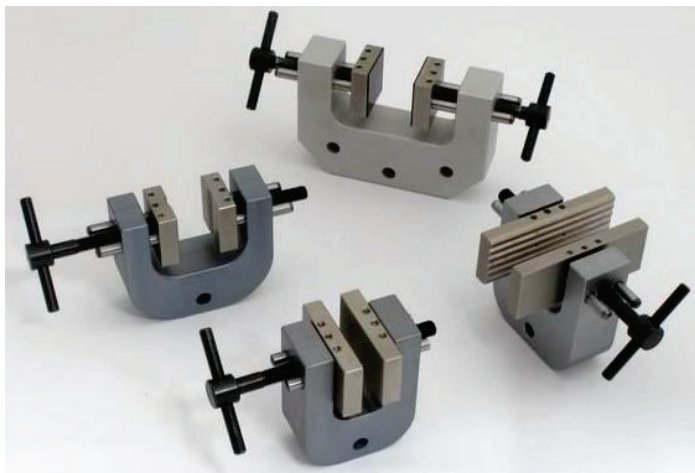

Jaws for TA240k: Scope of delivery 1 Set = 4 jaws

Item number	Surface	Clamping surface H x W	Weight/ pair
TA240k-B	Blank jaws	30 x 30mm	0.13 kg
TA240k-BG	Rubber jaws	30 x 30mm	0.13 kg
TA240k-BP	Pyramid jaws	30 x 30mm	0.12 kg
TA240k-BV2	V-jaws	30 x 30mm	0.12 kg
TA240k-BV3	V-jaws	30 x 30mm	0.13 kg
TA240k-BW	Wave jaws	30 x 30mm	0.12 kg
TA240k-BD	Diamond jaws	30 x 30mm	0.13 kg
TA240k-B50	Blank jaws	30 x 50mm	0.22 kg
TA240k-BG50	Rubber jaws	30 x 50mm	0.23 kg
TA240k-BP50	Pyramid jaws	30 x 50mm	0.21 kg
TA240k-BW50	Wave jaws	30 x 50mm	0.20 kg
TA240k-BD50	Diamond jaws	30 x 50mm	0.22 kg
TA240k-B80	Blank jaws	30 x 80mm	0.36 kg
TA240k-BG80	Rubber jaws	30 x 80mm	0.37 kg
TA240k-BP80	Pyramid jaws	30 x 80mm	0.35 kg
TA240k-BW80	Wave jaws	30 x 80mm	0.32 kg
TA240k-BD80	Diamond jaws	30 x 80mm	0.36 kg
TA240k-B100	Blank jaws	30 x 100mm	0.45 kg
TA240k-BG100	Rubber jaws	30 x 100mm	0.46 kg
TA240k-BP100	Pyramid jaws	30 x 100mm	0.45 kg
TA240k-BW100*	Wave jaws	30 x 100mm	0.51 kg
TA240k-BD100	Diamond jaws	30 x 100mm	0.45 kg

** Opening is reduced by 4 mm

Jaws with other dimensions and surface coatings on request

Specimen for V-jaws

BV3 jaws are preferable for samples with a larger diameter, clamping height 30 mm

	TA240k	TA240k-S20	TA240k-S30	TA240k-S50
TA240k-BV2	Ø 2 - 9 mm	Ø 2- 20 mm	Ø 2- 30 mm	Ø 2 - 50 mm
TA240k-BV3	Ø 3 - 9 mm	Ø 3 - 20 mm	Ø 3 - 30 mm	Ø 3 - 50 mm



Blank jaws

- Applicable for own further treatments
- Steel-blanks without coating



Rubber jaws

- 1mm rubber coating (NBR)
- Nickel plated



Pyramid jaws

- Pyramids 1.2x45°
- Hardened steel 58 HRC
- Nickel plated



V-jaws

- For all kinds of round samples
- Tooth pitch 1.2 mm
- Hardened steel 58HRC
- Nickel plated



Wave jaws

- For flexible materials
- Wave 5 mm
- Hardened steel 58HRC
- Nickel plated



Diamond jaws

- Clamping surface coated with synthetic diamonds D91 (170/200 mesh)
- Nickel plated



TA240k-BV2

TA240k-BV3



Thwing-Albert
Instrument Company



TA062322


thwingalbert.com

Inset jaws for TA240k: Scope of delivery 1 Set = 4 jaws

For a quick change of jaws, inset jaws require carriers (TA240k-GT)
The specified openings are reduced by 6mm


Item number	Surface	Clamping surface H x W	Weight Per pair
TA240k-GT	Carrier	-	0.12 kg
TA240k-EB	Blank Inset jaws	30 x 36mm	0.05kg
TA240k-EBG	Rubber Inset jaws	30 x 36mm	0.06 kg
TA240k-EBP	Pyramid Inset jaws	30 x 36mm	0.05kg
TA240k-EBD	Diamond Inset jaws	30 x 36mm	0.05kg

Inset jaws with other dimensions and surface coatings on request

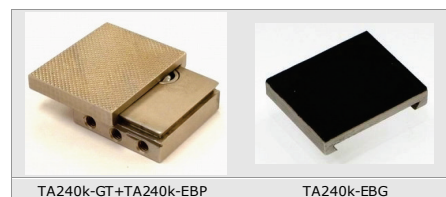


TA240k-GT+TA240k-EBP



TA240k-EBG

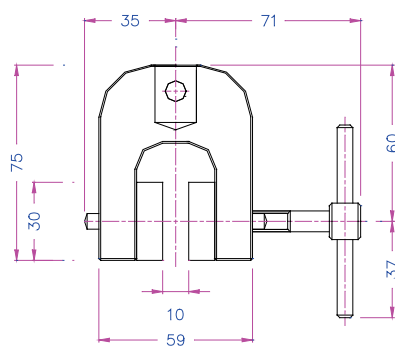


TA240K

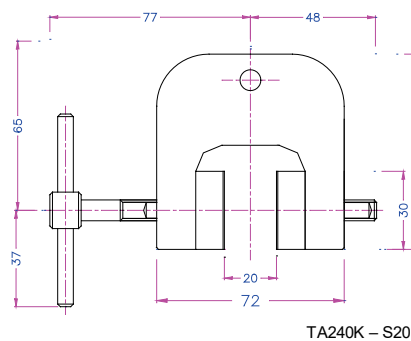


TA240K – S20

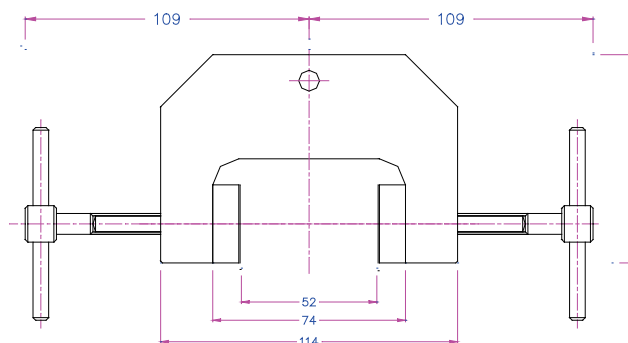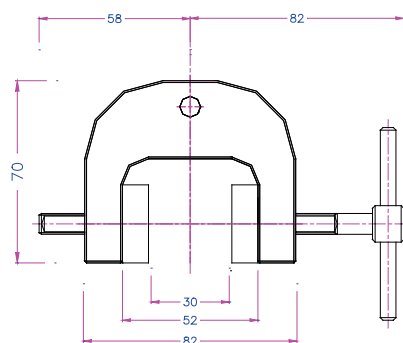

Pneumatic versions (see data sheet TA240k+ko)

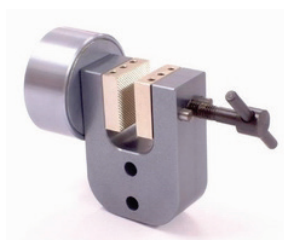

TA240k+ko with TA240k+BP pyramid jaws

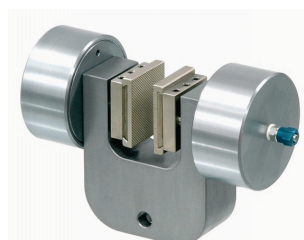

TA240k-S20+2ko with TA240k-EBP pyramid inset jaws



Thwing-Albert
Instrument Company



TA062322

thwingalbert.com