

Wedge Grip

TAS7 – 10kN

Applicable for smaller samples.

TAS7 grips are supplied as a pair, but can also be ordered separately (0.5 pair).
Grips and jaws need to be ordered separately.



Item No.	TAS7-10
• Tensile force	10 kN
• Body	Steel, nickel-coated
• Temperature range	0 ... +70°C (other ranges upon request)
• Coupling	Af159 (other couplings upon request)
• Scope of delivery	1 pair (without jaws)




Jaws for TAS7-10: Scope of delivery 1 set = 4 jaws

Item No.	Surface	Clamping surface H x W	Opening	Weight per pair
TAS7-BP	Pyramid jaws (serrated)	40x10 mm	0 – 8 mm	0.15 kg
TAS7-BV	V-jaws	Clamping height 40 mm	2 – 8 mm Ø	0.15 kg

Further jaw surfaces on request.

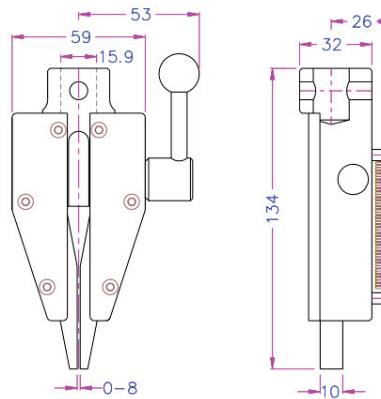

BP: Multi-purpose application range
Pyramids (serrated) 0.8x45°, hardened steel



BV: For all kinds of round samples
Tooth pitch 0.8 mm, hardened steel

Similar grips



TAS341



TAS501



TAS205k



TAS470



Thwing-Albert
Instrument Company



TA062322

thwingalbert.com