
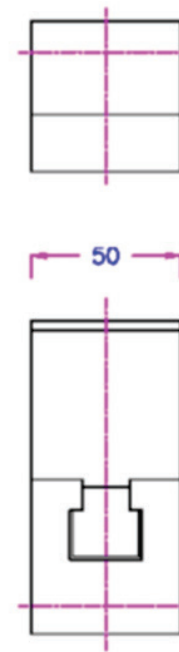


TA103

with wheel move the supports centric, for universal use.

- | | |
|-------------------------|--|
| Max. load: | Max. 50 kN depending on coupling |
| Max. temperature range: | 0 ... +70°C
Further temperature ranges on request |

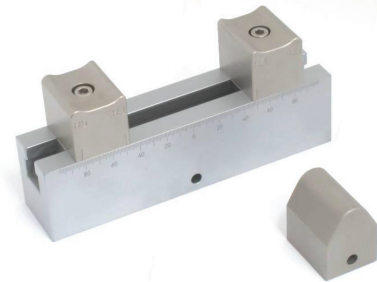

TA062322

thwingalbert.com

3 & 4 Point Bending Fixture



TA103

TA103-AR2R5-OR3-cgr

centric gear

R2 R5

upper Radius R3

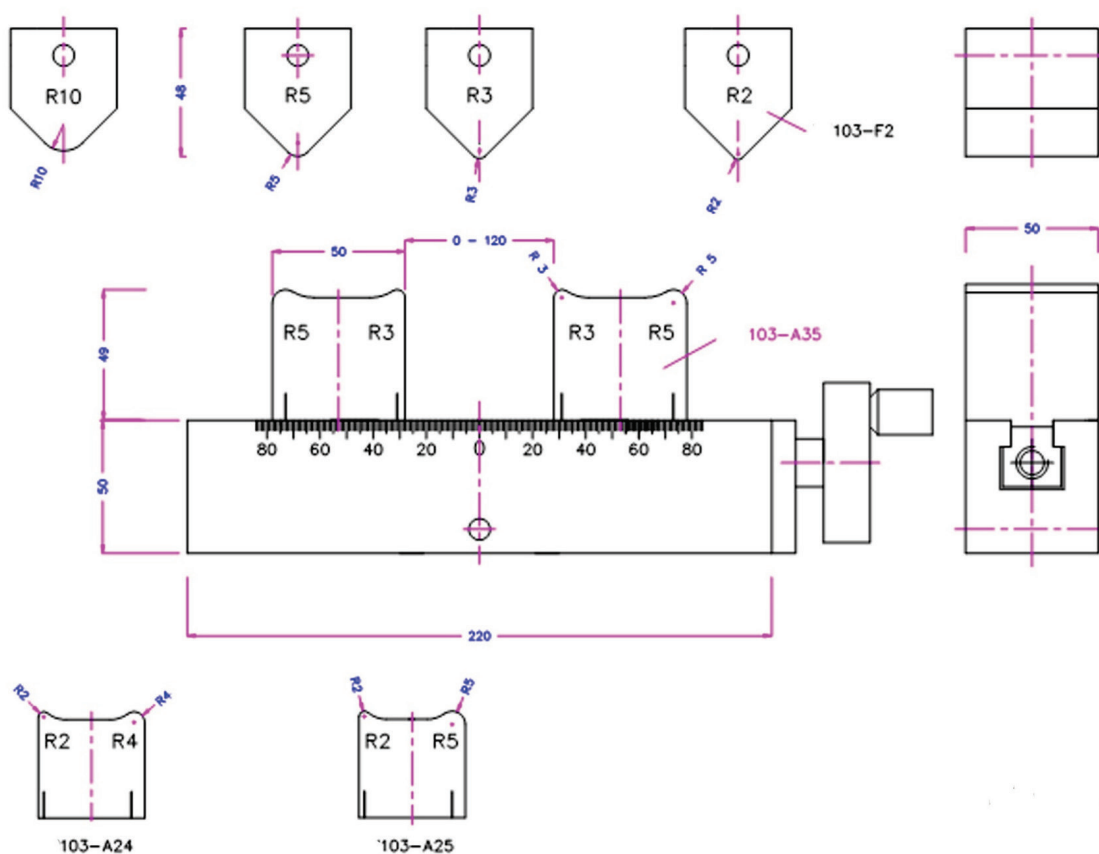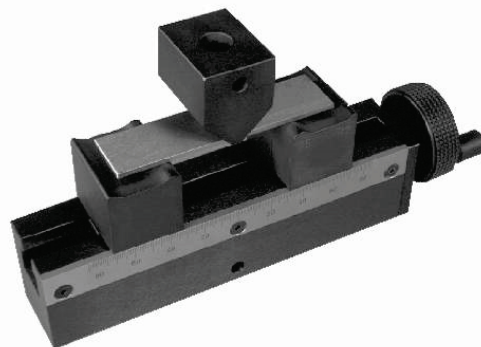

Thwing-Albert
Instrument Company




TA062322


thwingalbert.com

3 & 4 Point Bending Fixture

TA103




103-AR5R3
(2-4,2-5,3-5)




103-AX



103-oR2-159
(Af159: 1.5,2,3,5,10,12.5)
(Af20: 2)
(Af318: 5)




103-CR5
(1.5, 2, 4.5, 5)




103-CX




103-oX-159
(159, 19.1, 38)




103-CL10




103-CM6




103-CWR5




103-CWX127



103-CWL12



103-CWN8



103-D10
(4, 6, 10)



Thwing-Albert
Instrument Company



TA062322

thwingalbert.com