Puncture Fixture

TAS174

TAS174 PUNCTURE FIXTURE

Puncture fixture according to **ASTM-D5748**
to determine protrusion puncture resistance of stretch wrap film.
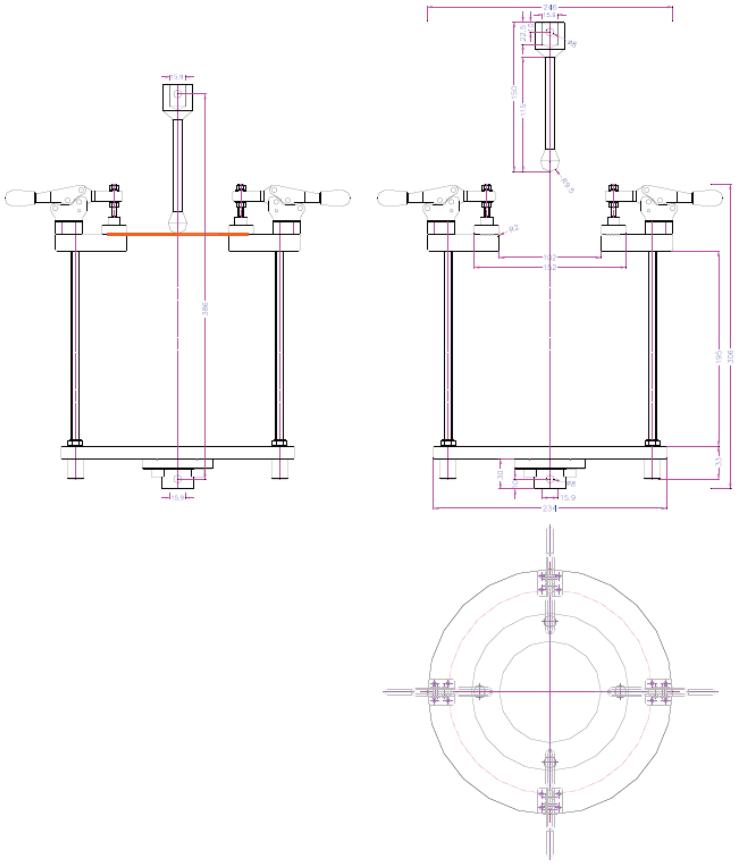
	TAS174-102-P19
Max. Load:	5 kN
Coupling:	Af159, Further couplings on request
Body:	Steel, nickel-plated
Temperature Range:	0 … +70°C Further temperature ranges on request
Scope of Supply:	1 Fixture