


Pneumatic Grips


TAS22-S60

TAS22-S60 Pneumatic Grips with symmetrical jaw movement.

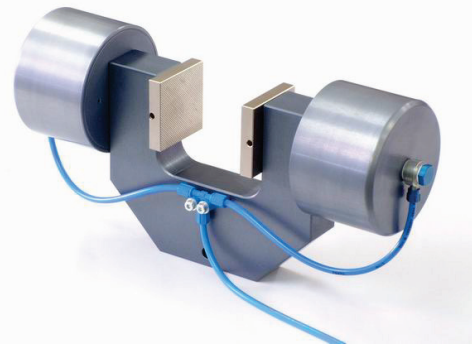

TAS22-S60

Load:	Max. 5 kN
Clamping force:	3.5 kN (7 bar) Max. 8 kN (16 bar with TA216)
Temperature range:	0° ... +70°C Further ranges on request
Standard coupling:	Af159 or Af20 Further couplings on request
Body:	Aluminum, anodized
Jaws:	Hardened steel 58HRC
Weight:	2.6 kg per grip without jaws
Scope of delivery:	1 pair of grips without jaws

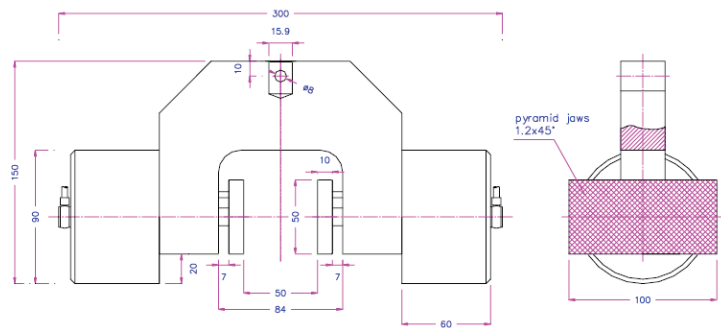

Jaws for TAS22* – Scope of delivery: 1 set = 4 jaws

Item no.	Surface	Clamping surface HxW	Opening	Weight per pair
TAS22-B	Blank (smooth) jaws	50x50 mm	0 – 60 mm	0.38 kg
TAS22-BP	Pyramid (serrated) jaws	50x50 mm	0 – 60 mm	0.36 kg
TAS22-BV4	V-jaws for round samples	Height 50 mm	4 - 30 mm Ø	0.19 kg
TAS22-BG	Rubber-coated jaws	50x50 mm	0 – 60 mm	0.39 kg
TAS22-BW	Wave jaws	50x50 mm	0 – 60 mm	0.34 kg
TAS22-BD	Diamond-coated jaws	50x50 mm	0 – 60 mm	0.38 kg
TAS22-B100	Blank (smooth) jaws	50x100 mm	0 – 60 mm	0.76 kg
TAS22-BP100	Pyramid (serrated) jaws	50x100 mm	0 – 60 mm	0.72 kg
TAS22-BG100	Rubber-coated jaws	50x100 mm	0 – 60 mm	0.78 kg
TAS22-BW100	Wave jaws	50x100 mm	0 – 60 mm	0.70 kg
TAS22-BD100	Diamond-coated jaws	50x100 mm	0 – 60 mm	0.76 kg

Insert Jaws for TAS22*

Jaw quick-change system. Insert jaws require a carrier (TAS22-GT). Scope of delivery: 1 set = 4 jaws

Item no.	Surface	Clamping surface HxW	Opening	Weight per pair
TAS22-GT	Carrier	-	-	0.32 kg
TAS22-EB	Blank insert jaws	50x50 mm	0 – 46 mm	0.32 kg
TAS22-EBV4	V-insert jaws for round samples	Height 50 mm	4 – 14 mm Ø	0.15 kg
TAS22-EBP	Pyramid (serrated) insert jaws	50x50 mm	0 – 46 mm	0.29 kg
TAS22-EBG	Rubber-coated insert jaws	50x50 mm	0 – 44 mm	0.33 kg
TAS22-EBW	Wave insert jaws	50x50 mm	0 – 46 mm	0.30 kg
TAS22-EBD	Diamond-coated insert jaws	50x50 mm	0 – 46 mm	0.32 kg

*Jaws with other surface coatings and openings are possible on request



Thwing-Albert
Instrument Company




thwingalbert.com


Pneumatic Grips

TAS22-S60


Examples of Custom Solutions

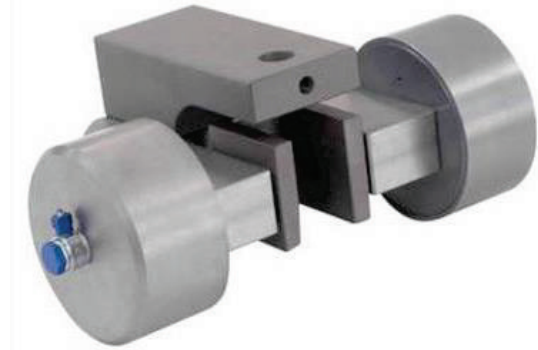

TAS22-S60-A90
Reduced height 90 mm

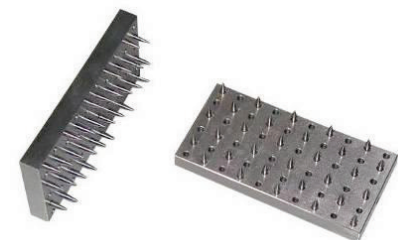

TAS22-B50x80-S3
Needle jaws for foam, Rockwool

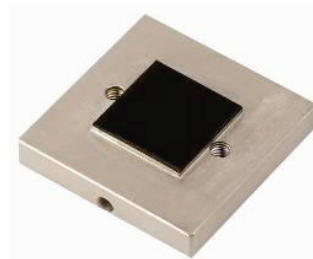

TAS22-BG25.4x25.4
Jaws 50x50 mm with elevated rubber-coated clamping surface 25.4 x 25.4 mm



TAS22-BP60
Pyramid jaws 60x60 mm



THS22-BP0.8x45
Pyramid jaws 50x50 mm with 0.8x45 pyramids

