

Wedge Grips

TA256

TA256-10 Wedge Grip 10 kN


Order information

TA256 grips are supplied in pairs, but can also be ordered as a single grip (0.5 pair).

Grips and jaws need to be ordered separately.

Jaws with other dimensions and surfaces on request.

| Item No. | TA256-10 |
|--------------------|---|
| Tensile force | 10 kN |
| Jaw Opening | 0-8 mm depending on jaws |
| Coupling | Af159 or Af20 Further couplings on request |
| Body | Steel, nickel-plated |
| Jaws | Steel, nickel-plated, hardened |
| Temperature range | 0°C up to +130°C (TA256-10) -70°C up to +280°C (TA256-10-T280) |
| Weight (each grip) | 1.36kg (without jaws) |
| Scope of delivery | 1 pair of grips (without jaws) |

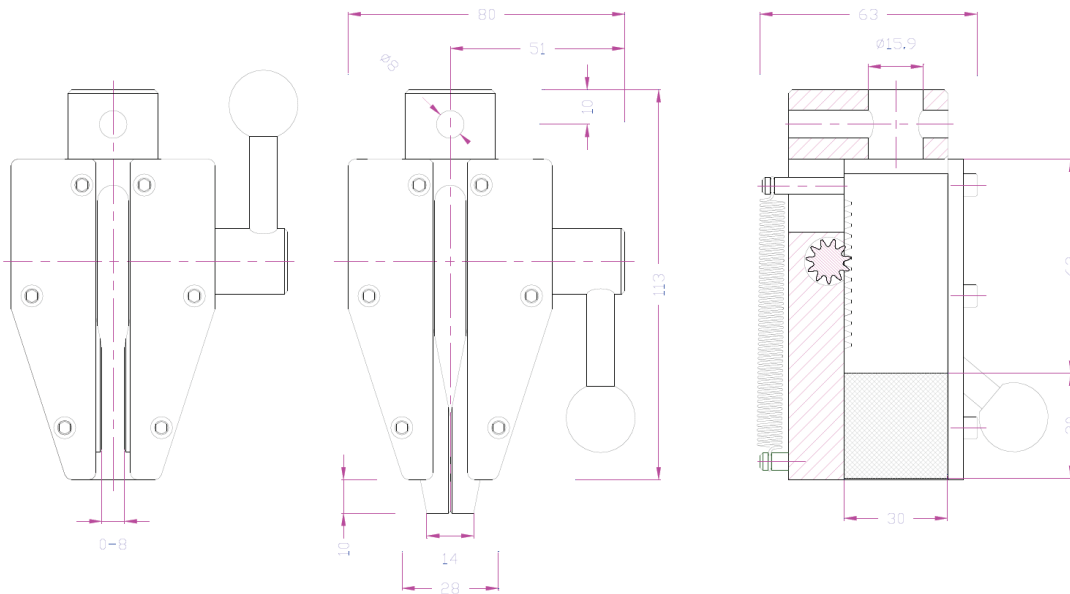

Wedge Grips

TA256

Scope of supply: 1 set = 4 jaws

| Item no. | Surface | Clamping surface H x W | Opening | Weight 1 pair |
|----------|-------------------------|---------------------------|------------------------|------------------|
| TA256-B | Blank jaws | 30 x 30 mm | 0 – 8 mm | 0.44 kg |
| TA256-BP | Pyramid (serrated) jaws | 30 x 30 mm | 0 – 8 mm | 0.43 kg |
| TA256-BV | V jaws | Height 30 mm | 3 – 8 mm \varnothing | 0.44 kg |
| TA256-BG | Rubber-coated jaws | 30 x 30 mm | 0 – 6 mm | 0.45 kg |
| TA256-BD | Diamond-coated jaws | 30 x 30 mm | 0 – 8 mm | 0.44 kg |



TA256-B
Blank jaws

- Suitable for own further treatments
- Nickel-plated



TA256-BP
Pyramid (serrated) jaws

- Multipurpose application range
- Pyramids 1x45°
- Hardened steel 58 HRC
- Nickel-plated



TA256-BV
V jaws

- For all kinds of round samples
- Tooth pitch 1 mm
- Hardened steel 58 HRC
- Nickel-plated





TA256-BG
Rubber-coated jaws

- 1 mm rubber coating (NBR)
- Nickel-plated



TA256-BD
Diamond jaws

- Clamping surface coated with synthetic diamonds D91 (170/200 mesh)
- Nickel-plated



Jaws with other dimensions and surface coatings on request



Thwing-Albert
Instrument Company



TA062322

thwingalbert.com