

Pneumatic Grip


TA108 – 3.5kN

TA108 Pneumatic Grip 3.5 kN

TA108 grips are supplied in pairs, but can also be ordered as a single grip (0.5 pair).

Grips and jaws need to be ordered separately.

Item No.	TA108
Clamping force	3.5 kN/7 bar
Temperature range	0 to + 70°C Other temperature ranges on request
Body	Aluminium, anodized
Pneumatic connection	1/8"
Weight per grip	1.3 kg each grip (without jaws)
Scope of delivery	1 pair of grips (without jaws)

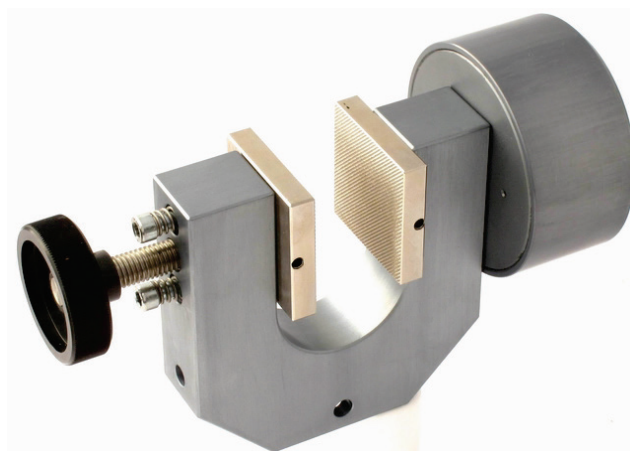

Jaws for TA108 Scope of delivery 1 set = 4 jaws

Item No.	Jaw surface	Clamping surface H x W	Opening	Weight / pair
TA108-B	Blank (smooth) jaws	50x50mm	0-34 mm	0.38kg
TA108-BG	Rubber jaws	50x50mm	0-32 mm	0.38kg
TA108-BV4	V-jaws	Clamping height 50mm	4-30 mm Ø	0.45kg
TA108-BP	Pyramid (serrated) jaws	50x50mm	0-34 mm	0.36kg
TA108-BW	Wave jaws	50x50mm	0-34 mm	0.34kg
TA108-BD	Diamond jaws	50x50mm	0-34 mm	0.38kg
TA108-B100	Blank (smooth) jaws	50x100mm	0-34 mm	0.76kg
TA108-BG100	Rubber jaws	50x100mm	0-32 mm	0.78kg
TA108-BP100	Pyramid (serrated) jaws	50x100mm	0-34 mm	0.72kg
TA108-BW100	Wave jaws	50x100mm	0-34 mm	0.69kg
TA108-BD100	Diamond jaws	50x100mm	0-34 mm	0.76kg

Jaws with differing dimensions and surfaces available on request.



Thwing-Albert
Instrument Company




TA062322


thwingalbert.com

Pneumatic Grip


TA108 – 3.5kN

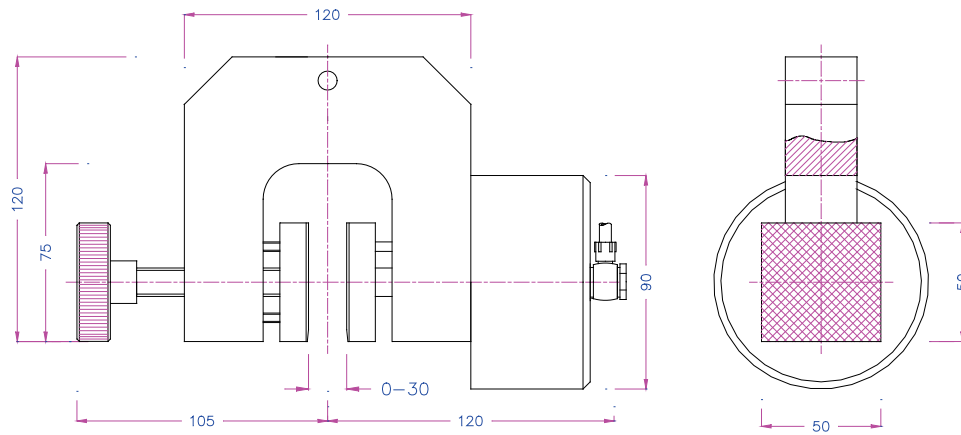

Other versions and customer-built solutions.



TA108-12 Opening up to 60mm



TA108-BG25x25




TA108-BP0.8x45 (small pyramids)


Jaws surfaces




TA108-B
Blank jaws
without coating




TA108-BG
Rubber coating
1mm (NBR)



TA108-BP
Pyramids 1.2x45°,
hardened steel



TA108-BV
Tooth pitch 1.2mm,
hardened steel



TA108-BW
Wave 5mm,
hardened steel



TA108-BD
Diamond coating
(synthetic)



Thwing-Albert
Instrument Company



TA062322

thwingalbert.com